


BOLZENKUPPLUNG APC-A

M 1501 330 E-DE-2009-05

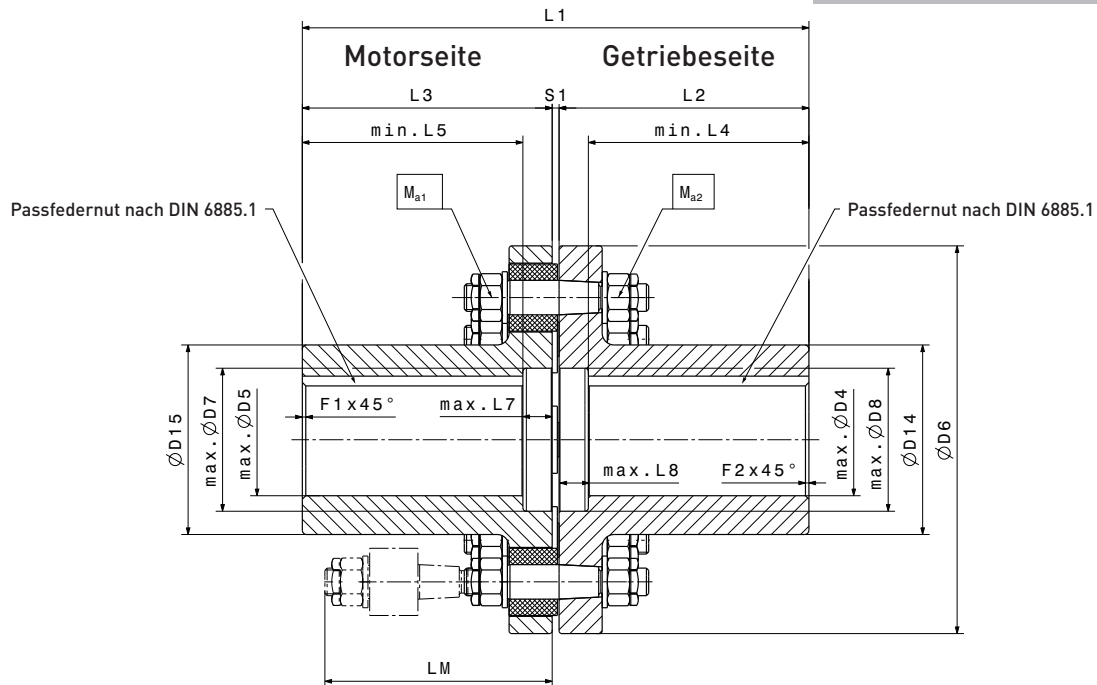

| Typ APC-A | | APC160A | APC200A | APC250A | APC315A | APC400A | APC500A |
|----------------------|------------------|---------|---------|---------|---------|---------|---------|
| T_{KN} | Nm | 270 | 550 | 1000 | 2000 | 3500 | 6500 |
| T_{Kmax} | Nm | 540 | 1100 | 2000 | 4000 | 7000 | 13000 |
| n_{max} | min-1 | 4800 | 3900 | 3200 | 2500 | 2000 | 1600 |
| Max $\varnothing D4$ | mm | 48 | 55 | 65 | 90 | 100 | 120 |
| Max $\varnothing D5$ | mm | 48 | 55 | 65 | 90 | 100 | 120 |
| $\varnothing D6$ | mm | 150 | 185 | 225 | 280 | 335 | 410 |
| Max $\varnothing D7$ | mm | 58 | 66 | 83 | 104 | 120 | 140 |
| Max $\varnothing D8$ | mm | 58 | 66 | 83 | 104 | 120 | 140 |
| $\varnothing D14$ | mm | 75 | 90 | 110 | 145 | 170 | 200 |
| $\varnothing D15$ | mm | 75 | 90 | 110 | 145 | 170 | 200 |
| $L1$ | mm | 170 | 224 | 294 | 311 | 355 | 386 |
| $L2$ | mm | 83 | 110 | 145 | 153 | 175 | 190 |
| $L3$ | mm | 83 | 110 | 145 | 153 | 175 | 190 |
| Min $L4$ | mm | 73 | 95 | 128 | 130 | 145 | 160 |
| Min $L5$ | mm | 73 | 95 | 128 | 130 | 145 | 160 |
| Max $L7$ | mm | 10 | 15 | 17 | 23 | 30 | 30 |
| Max $L8$ | mm | 10 | 15 | 17 | 23 | 30 | 30 |
| LM | mm | 85 | 110 | 130 | 155 | 175 | 190 |
| $S1$ | mm | 4 | 4 | 4 | 5 | 5 | 6 |
| F1 / F2x45° | | 2 | 2 | 2 | 2 | 2,5 | 2,5 |
| $Ma 1$ | Nm | 20 | 30 | 40 | 80 | 120 | 160 |
| $Ma 2$ | Nm | 25 | 45 | 80 | 160 | 240 | 320 |
| I_{ges} | kgm ² | 0,016 | 0,047 | 0,113 | 0,328 | 0,778 | 1,965 |
| G_{ges} | kg | 7 | 14 | 24 | 42 | 70 | 115 |