
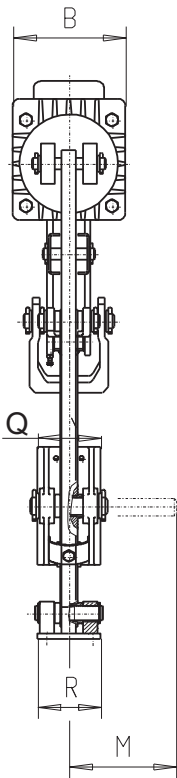


DRUM BRAKE

SBH-ELDRO

M 500 6500 E-EN-2017-05

acc. to DIN 15435 | spring applied, thruster released

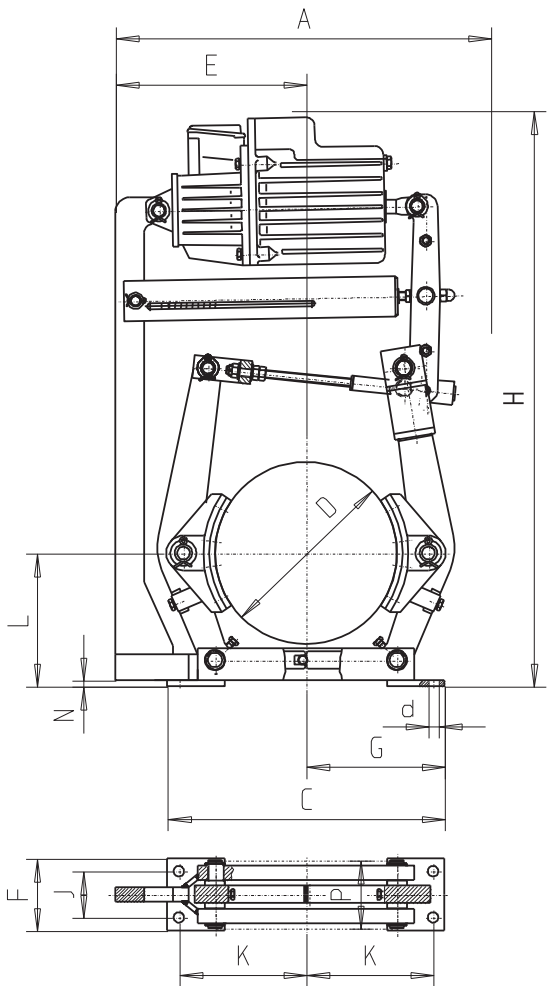

WHEN ORDERING
PLEASE ADVISE:

- brake type and thruster e.g. SBH 250/23/5
- voltage and frequency for thruster
- with or without lining wear compensator
- options (switches, manual release lever, etc.)

THRUSTER SIZES

- 1 = Ed 23/5
- 2 = Ed 30/5
- 3 = Ed 50/6
- 4 = Ed 80/6
- 5 = Ed 121/6
- 6 = Ed 201/6

BRAKE-TYPE	Thruster SIZE	TORQUE RANGE in Nm at $\mu = 0,4$	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	d	kg*
SBH 200	1	50 - 325	520	160	320	200	270	90	160	750	55	145	160	130	10	75	70	96	14	28
	2	50 - 425	520	160	320	200	270	90	160	750	55	145	160	130	10	75	70	96	14	28
SBH 250	1	50 - 350	530	160	400	250	284	110	200	870	65	180	190	155	10	95	90	113	18	40
	2	100 - 450	530	160	400	250	284	110	200	870	65	180	190	155	10	95	90	113	18	40
	3	100 - 850	570	195	400	250	284	110	200	910	65	180	190	155	10	95	90	113	18	40
SBH 315	1	50 - 475	640	160	480	315	330	125	240	965	80	220	230	185	15	118	110	135	18	52
	2	100 - 575	640	160	480	315	330	125	240	965	80	220	230	185	15	118	110	135	18	52
	3	50 - 1250	650	195	480	315	330	125	240	995	80	220	230	185	15	118	110	135	18	52
	4	150 - 1950	650	195	480	315	330	125	240	995	80	220	230	185	15	118	110	135	18	52
SBH 400	2	150 - 700	760	160	600	400	407	160	300	1050	100	270	280	230	15	150	140	167	22	82
	3	100 - 1300	760	195	600	400	407	160	300	1085	100	270	280	230	15	150	140	167	22	82
	4	250 - 2200	760	195	600	400	407	160	300	1085	100	270	280	230	15	150	140	167	22	82
	5	300 - 2900	840	240	600	400	490	160	300	1095	100	270	280	230	15	150	140	167	22	88
SBH 500	3	150 - 1700	900	195	710	500	490	190	355	1330	130	325	340	285	13	190	180	190	22	130
	4	200 - 2700	900	195	710	500	490	190	355	1330	130	325	340	285	13	190	180	190	22	130
	5	400 - 4500	900	240	710	500	490	190	355	1330	130	325	340	285	13	190	180	190	22	130
	6	700 - 5600	900	240	710	500	490	190	355	1330	130	325	340	285	13	190	180	190	22	130

* kg without thruster